

Technical Data Sheet

SL-T & SL-T/E


Triple-tube 2-Pin & 4-Pin Plug-in Compact Fluorescent Lamps



Technical/Electrical Data & Physical Characteristics

Item Number	Description	Wattage	Bulb	Life	Base	CRI	Light Output	Colour Temperature	Bulb Diameter	M.O.L.	Case Qty.	E.O.L.
G14000-003	SL26T/827	26W	3xT4	10,000 hrs	GX24d-2	82	1,800 lm	2700K	41mm	137mm	50	
G15000-003	SL18T/E/827/4P	18W	3xT4	10,000 hrs	GX24q-2	82	1,200 lm	2700K	41mm	115mm	50	√
G15020-003	SL18T/E/830/4P	18W	3xT4	10,000 hrs	GX24q-2	82	1,200 lm	3000K	41mm	115mm	50	√
G15040-003	SL18T/E/835/4P	18W	3xT4	10,000 hrs	GX24q-2	82	1,200 lm	3500K	41mm	115mm	50	√
G15060-003	SL18T/E/841/4P	18W	3xT4	10,000 hrs	GX24q-2	82	1,200 lm	4100K	41mm	115mm	50	√
G15100-003	SL26T/E/827/4P	26W	3xT4	10,000 hrs	GX24q-3	82	1,800 lm	2700K	41mm	130mm	50	√
G15120-003	SL26T/E/830/4P	26W	3xT4	10,000 hrs	GX24q-3	82	1,800 lm	3000K	41mm	130mm	50	√
G15140-003	SL26T/E/835/4P	26W	3xT4	10,000 hrs	GX24q-3	82	1,800 lm	3500K	41mm	130mm	50	√
G15160-003	SL26T/E/841/4P	26W	3xT4	10,000 hrs	GX24q-3	82	1,800 lm	4100K	41mm	130mm	50	√
G15200-003	SL32T/E/827/4P	32W	3xT4	10,000 hrs	GX24q-3	82	2,400 lm	2700K	41mm	146mm	50	√
G15220-003	SL32T/E/830/4P	32W	3xT4	10,000 hrs	GX24q-3	82	2,400 lm	3000K	41mm	146mm	50	√
G15240-003	SL32T/E/835/4P	32W	3xT4	10,000 hrs	GX24q-3	82	2,400 lm	3500K	41mm	146mm	50	√
G15260-003	SL32T/E/841/4P	32W	3xT4	10,000 hrs	GX24q-3	82	2,400 lm	4100K	41mm	146mm	50	√
G15300-003	SL42T/E/827/4P	42W	3xT4	10,000 hrs	GX24q-4	82	3,200 lm	2700K	41mm	165mm	50	√
G15320-003	SL42T/E/830/4P	42W	3xT4	10,000 hrs	GX24q-4	82	3,200 lm	3000K	41mm	165mm	50	√
G15340-003	SL42T/E/835/4P	42W	3xT4	10,000 hrs	GX24q-4	82	3,200 lm	3500K	41mm	165mm	50	√
G15360-003	SL42T/E/841/4P	42W	3xT4	10,000 hrs	GX24q-4	82	3,200 lm	4100K	41mm	165mm	50	√
G15415-003	SL57T/E/827/4P	57W	3xT4	10,000 hrs	GX24q-5	82	4,200 lm	2700K	41mm	194mm	50	
G15420-003	SL57T/E/830/4P	57W	3xT4	10,000 hrs	GX24q-5	82	4,200 lm	3000K	41mm	194mm	50	
G15425-003	SL57T/E/835/4P	57W	3xT4	10,000 hrs	GX24q-5	82	4,200 lm	3500K	41mm	194mm	50	
G15430-003	SL57T/E/841/4P	57W	3xT4	10,000 hrs	GX24q-5	82	4,200 lm	4100K	41mm	194mm	50	

Certifications

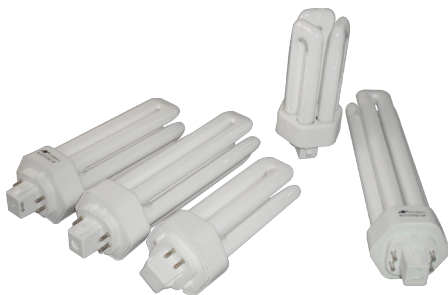

TCLP
COMPLIANT



EOL PROTECTED

All specifications are subject to change without notice. Actual performance may vary depending on operating conditions.

www.symbanlighting.com

Symban Lighting Corp.
99 First Gulf Blvd. Brampton, ON
T. 905.450.5999 | F. 905.450.6665