

# SLFE-275T12-347V

**P38320-003**

Electronic Instant Start Ballast

Type 1 Outdoor | Class P

No PCB'S | O.C.V. 580V

Sound Rating: A

347V | 60HZ

Complies with FCC Part 18 Class A for EMI & RFI (Non-consumer limits)



www.symbanlighting.com

99 First Gulf Blvd. Brampton, L6W 4T8

P. 905.450.5999

F. 905.450.6665


Number of Lamps	Lamps Operated	Rated Lamp Wattage	Power Factor	Ballast Factor	Ballast Efficacy Factor	Max THD%	Min Starting Temp (°F/°C)	Input Power (W)	Max Line Current (A)	Certifications
2	F96T12	75W	0.97	1.00	0.67	20	0/-18	150	0.44	c  US
2	F96T12/ES	60W	0.97	0.98	0.85	20	60/16	115	0.34	c  US
2	F72T12	55W	0.97	1.00	0.85	20	0/-18	117	0.35	c  US

\* Also operates 1 lamp.

## Physical Characteristics

### Case Dimensions


	Length (L)	Width (W)	Height (H)	Mounting (M)
Inches	9 <sup>1</sup> / <sub>8</sub> "	2 <sup>1</sup> / <sub>16</sub> "	1 <sup>1</sup> / <sub>2</sub> "	8 <sup>1</sup> / <sub>8</sub> "
mm	240 mm	62 mm	38 mm	226 mm

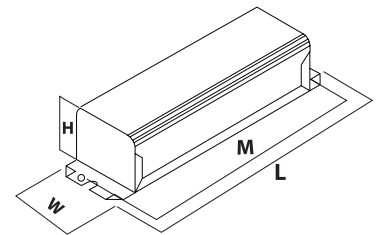

### Lead Length

Colour	BLACK	WHITE	BLUE	RED
Length	24" (610 mm)	24" (610 mm)	45" (1140 mm)	69" (1750 mm)
Strip	3/8"	3/8"	3/8"	3/8"

## Electrical Wiring Diagram

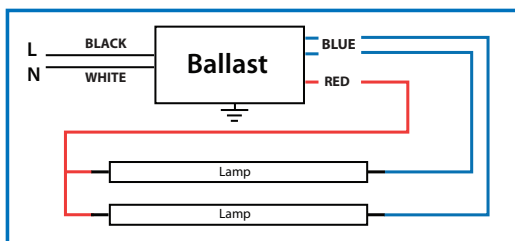

5-year warranty!



## Product Label

**SLFE-275T12-347V**  
ELECTRONIC INSTANT START BALLAST  
**P38320-003**

(2) Linear T12 Lamps (F72T12 - F96T12)  
Max Line Current: 0.44A

High Power Factor: 0.97  
Open Circuit Voltage: 580V  
Sound Rating: A  
Complies with FCC 47 CFR Part 18, Non-consumer  
Inherent Thermal Protection  
Class P, Type 1 Outdoor, No PCBs  
Suitable for lampholder rated 600V  
Max Case Temp: 70°C  
Min Start Temp: 16°C

Ground ballast and mount lamps within 3/4" of grounded metal reflector

**WARNING:** Install in accordance with national and local electric codes.

5-year warranty!

c US  
241914

**347V**  
(60/60HZ)