

Technical Data Sheet

Satellite[®]-LFL T5 High Bay fixture




Description

These high efficiency linear T5 fluorescent high bay fixtures are suitable for indoor suspended mounting applications, including warehouses and retail areas. The functional design includes 4-lamp F54T5/HO and 6-lamp F54T5/HO models.

Construction

The housing is formed of high 17-gauge steel, and includes ½" conduit knockouts on the top (5) and sides (2), and (4) slots for chain or wire harnesses.

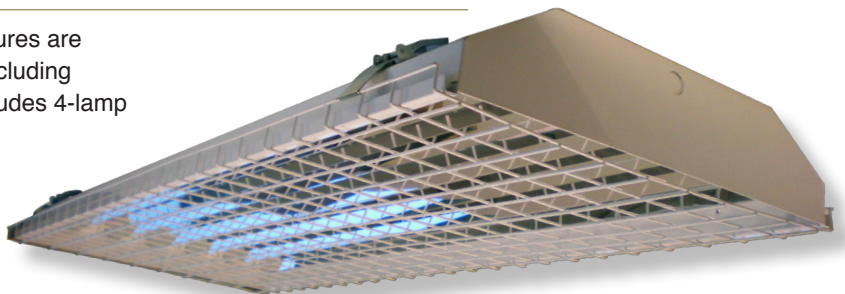

Finish

The housing and wire guard are finished in white baked enamel gloss paint.

Diffuser

The fixture features a specular pure anodized aluminum reflector, with a reflectance of 86%.

Electrical

All models are CSA approved for indoor use, suitable for damp locations. All models are wired with UL listed or CSA approved electronic programmed rapid start ballasts, for voltages ranging from 120V - 347V.

Options

Options include a removable hinged steel wire guard, high-reflectance diffuser, and aircraft cable harness.

Ordering Information

Model	Lamp Configuration	Voltage	Optional Heavy Duty Wire Guard	Optional Reflector Upgrade
Satellite-LFL-	4xF54T5/HO 6xF54T5/HO	-120MV -347V	-WG	-M95



Made in Canada



All specifications are subject to change without notice. Actual performance may vary depending on operating conditions.

www.symbanlighting.com

Symban Lighting Corp.
99 First Gulf Blvd. Brampton, ON
T. 905.450.5999 | F. 905.450.6665

Technical Data Sheet





Satellite-LFL

T5 High Bay fixture



Dimensions

Model	L	W	H
Satellite-LFL-4xF54T5/H0	1225mm	348mm	100mm
Satellite-LFL-6xF54T5/H0	1225mm	505mm	100mm

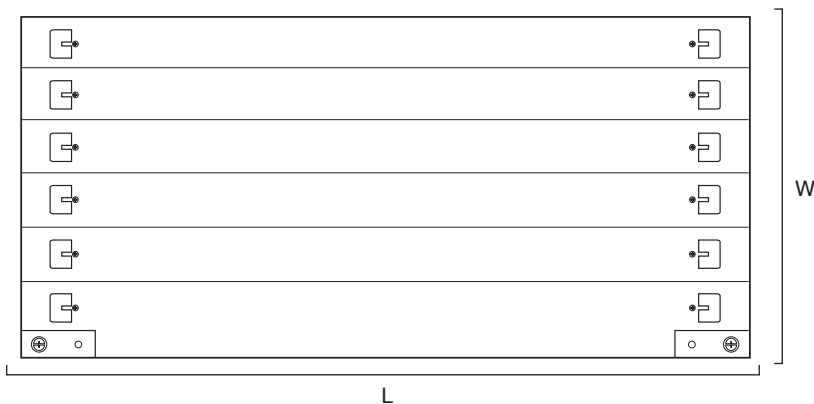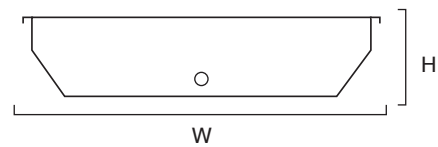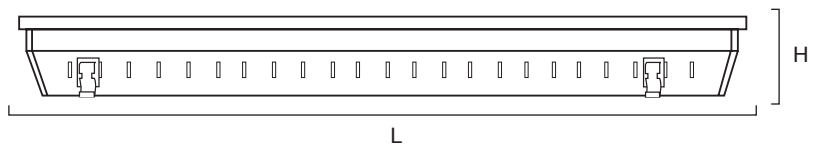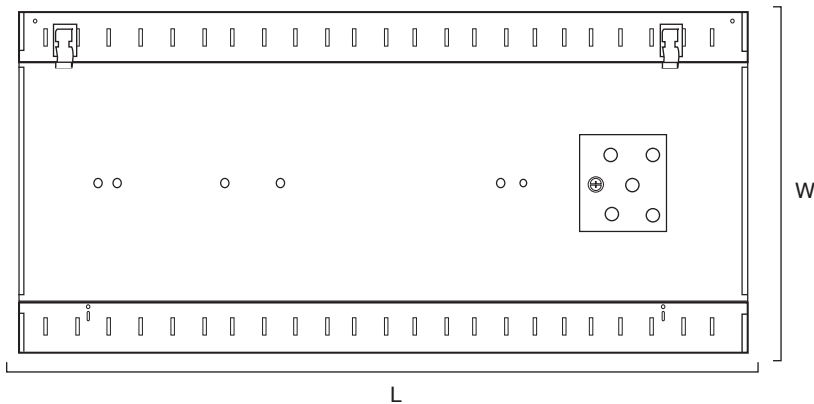

All specifications are subject to change without notice. Actual performance may vary depending on operating conditions.