

Technical Data Sheet


LINEAR FLUORESCENT

T5 Programmed Rapid Start Lamps




Technical/Electrical Data & Physical Characteristics

Item Number	Description	Wattage	Light Output		Life	Base	CRI	Colour Temperature	Nominal Length	Dimensions			Case Qty.
			Initial	Mean						A	B	D	
H14000-003	F14T5/830/ECO	14W	1,350lm	1,250lm	24,000 hrs	G5	82	3000K	22"	549mm	563mm	16mm	40
H14020-003	F14T5/835/ECO	14W	1,350lm	1,250lm	24,000 hrs	G5	82	3500K	22"	549mm	563mm	16mm	40
H14040-003	F14T5/841/ECO	14W	1,350lm	1,250lm	24,000 hrs	G5	82	4100K	22"	549mm	563mm	16mm	40
H28000-003	F28T5/830/ECO	28W	2,900lm	2,700lm	24,000hrs	G5	82	3000K	46"	1,149mm	1,156mm	16mm	40
H28020-003	F28T5/835/ECO	28W	2,900lm	2,700lm	24,000 hrs	G5	82	3500K	46"	1,149mm	1,156mm	16mm	40
H28040-003	F28T5/841/ECO	28W	2,900lm	2,700lm	24,000 hrs	G5	82	4100K	46"	1,149mm	1,156mm	16mm	40
H28041-003	F28T5/841/ECO SHATTER-PROOF	28W	2,900lm	2,700lm	24,000 hrs	G5	82	4100K	46"	1,149mm	1,156mm	16mm	40
H28050-003	F28T5/850/ECO	28W	2,900lm	2,700lm	24,000 hrs	G5	82	5000K	46"	1,149mm	1,156mm	16mm	40
H35000-003	F35T5/830/ECO	35W	3,650lm	3,400lm	24,000 hrs	G5	82	3000K	57"	1,449mm	1,456mm	16mm	40
H35020-003	F35T5/835/ECO	35W	3,650lm	3,400lm	24,000 hrs	G5	82	3500K	57"	1,449mm	1,456mm	16mm	40
H35040-003	F35T5/841/ECO	35W	3,650lm	3,400lm	24,000 hrs	G5	82	4100K	57"	1,449mm	1,456mm	16mm	40

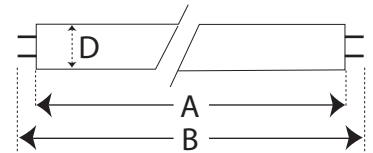

Certifications

TCLP
COMPLIANT

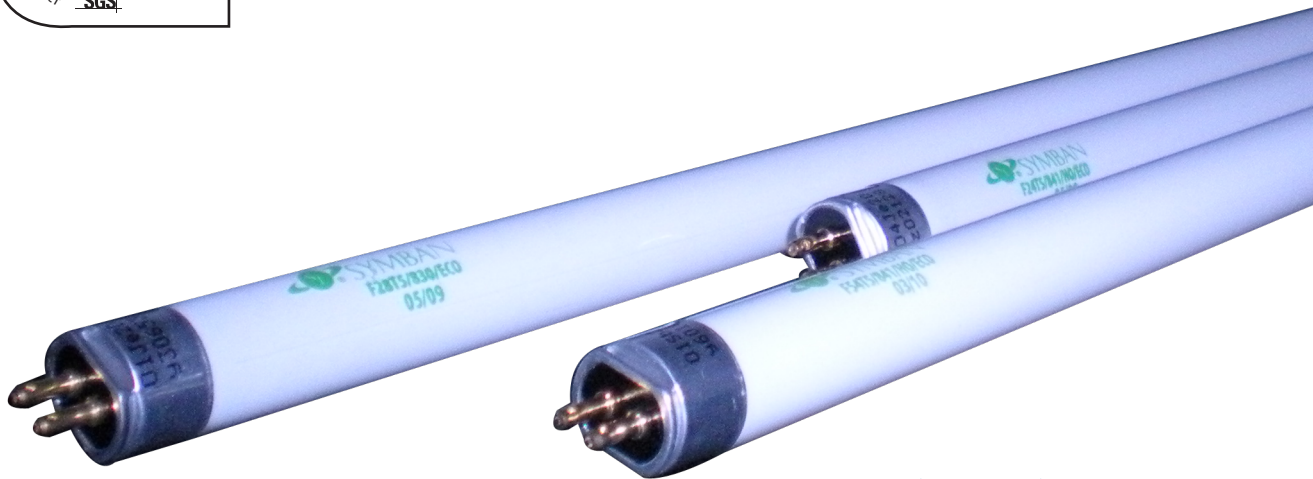

Symban Lighting Corp.
99 First Gulf Blvd. Brampton, ON
T. 905.450.5999 | F. 905.450.6665

All specifications are subject to change without notice. Actual performance may vary depending on operating conditions.

www.symbanlighting.com