

# Technical Data Sheet

## Jupiter<sup>®</sup>-2-LED



### Description

These high efficiency LED large wallpak fixtures can be used for outdoor wall mount applications, including parking areas, loading docks, security lighting, waterfronts, recreational areas, and perimeter lighting. The functional design includes models in 120W and 150W.

### Construction

The housing is formed of die-cast aluminum and includes ½" conduit entries on the top (1), side (1), bottom (1), and back (1). The side hinged door includes a rubber gasket.

### Finish



The housing is finished in bronze, in a durable polyester coat.

### Electrical

All models are ETL and DLC listed for outdoor use, and are available in 120-277V or 347V, 60 Hz operation.

### Ordering Information

Item Number	Description	Power	Input Voltage	Colour Temp.	LED Source/Fixture Light Output	Beam Angle	CRI	Operating Temp	Life
S18390-003	JUPITER-2-LED-120W-4K-120MV-BRONZE	120W	100-277V	4000K	12000/8500 lm	120°	80	-40° C to 50° C	50,000 hrs
S18395-003	JUPITER-2-LED-120W-4K-347V-BRONZE	120W	347V	4000K	12000/8500 lm	120°	80	-40° C to 50° C	50,000 hrs
S18430-003	JUPITER-2-LED-150W-4K-120MV-BRONZE	150W	100-277V	4000K	14000/10500 lm	120°	80	-40° C to 50° C	50,000 hrs
S18435-003	JUPITER-2-LED-150W-4K-347V-BRONZE	150W	347V	4000K	14000/10500 lm	120°	80	-40° C to 50° C	50,000 hrs

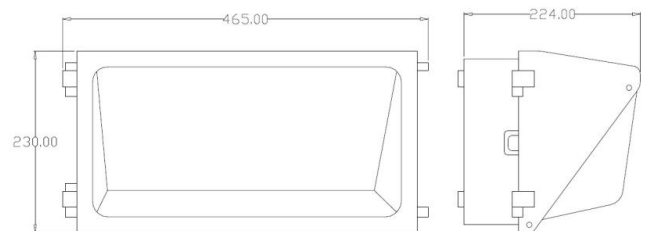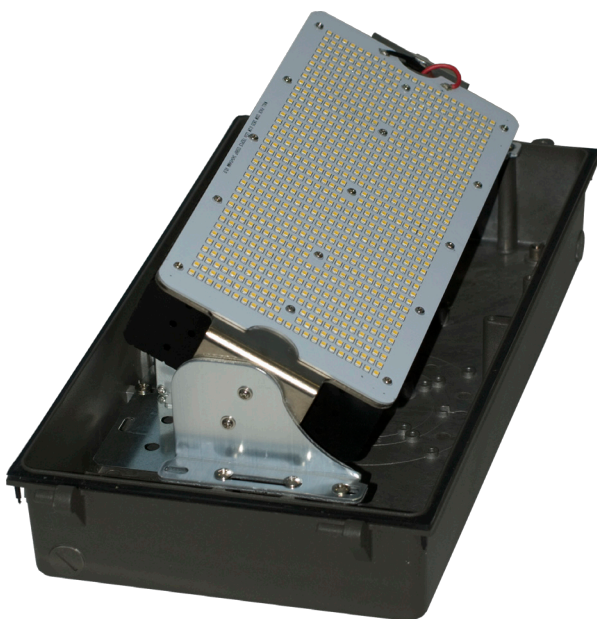

**Symban Lighting Corp.**  
 99 First Gulf Blvd. Brampton, ON  
 T. 905.450.5999 | F. 905.450.6665

All specifications are subject to change without notice. Actual performance may vary depending on operating conditions.