

# Technical Data Sheet


## HALOGEN PAR

### PAR30 Halogen Lamps



#### Technical/Electrical Data & Physical Characteristics

Item Number	Description	Wattage	Design Voltage	Life	Base	Lamp Type	Light Output	Beam Angle	Diameter	M.O.L.	Case Qty.
D14200-003	50PAR30/HAL/NSP 120V	50W	120V	3,000 hrs	E26	PAR30	550lm	narrow spot	95mm	90mm	15/90
D14210-003	50PAR30/HAL/NSP 130V	50W	130V	5,000 hrs @120V 3,000 hrs @130V	E26	PAR30	440lm @120V 550lm @130V	narrow spot	95mm	90mm	15/90
D14230-003	50PAR30/HAL/NFL 120V	50W	120V	3,000 hrs	E26	PAR30	550lm	narrow flood	95mm	90mm	15/90
D14240-003	50PAR30/HAL/NFL 130V	50W	130V	5,000 hrs @120V 3,000 hrs @130V	E26	PAR30	440lm @120V 550lm @130V	narrow flood	95mm	90mm	15/90
D14260-003	50PAR30/HAL/FL 120V	50W	120V	3,000 hrs	E26	PAR30	550lm	flood	95mm	90mm	15/90
D14270-003	50PAR30/HAL/FL 130V	50W	130V	5,000 hrs @120V 3,000 hrs @130V	E26	PAR30	440lm @120V 550lm @130V	flood	95mm	90mm	15/90
D14300-003	50PAR30/HAL/FL/FROST 120V	50W	120V	3,000 hrs	E26	PAR30	-	flood frost	95mm	90mm	15/90
D16100-003	75PAR30/HAL/NSP 120V	75W	120V	3,000 hrs	E26	PAR30	1,050lm	narrow spot	95mm	90mm	15/90
D16110-003	75PAR30/HAL/NSP 130V	75W	130V	5,000 hrs @120V 3,000 hrs @130V	E26	PAR30	850lm @120V 1,050lm @130V	narrow spot	95mm	90mm	15/90
D16130-003	75PAR30/HAL/NFL 120V	75W	120V	3,000 hrs	E26	PAR30	850lm	narrow flood	95mm	90mm	15/90
D16140-003	75PAR30/HAL/NFL 130V	75W	130V	5,000 hrs @120V 3,000 hrs @130V	E26	PAR30	850lm @120V 1,050lm @130V	narrow flood	95mm	90mm	15/90
D16160-003	75PAR30/HAL/FL 120V	75W	120V	3,000 hrs	E26	PAR30	850lm	flood	95mm	90mm	15/90
D16170-003	75PAR30/HAL/FL 130V	75W	130V	5,000 hrs @120V 3,000 hrs @130V	E26	PAR30	850lm @120V 1,050lm @130V	flood	95mm	90mm	15/90
D16190-003	75PAR30/HAL/FL/FROST 120V	75W	120V	3,000 hrs	E26	PAR30	-	flood frost	95mm	90mm	15/90
D16200-003	75PAR30/HAL/FL/BLUE 130V	75W	130V	5,000 hrs @120V 3,000 hrs @130V	E26	PAR30	-	flood blue	95mm	90mm	15/90
D16210-003	75PAR30/HAL/FL/GREEN 130V	75W	130V	5,000 hrs @120V 3,000 hrs @130V	E26	PAR30	-	flood green	95mm	90mm	15/90
D16220-003	75PAR30/HAL/FL/RED 130V	75W	130V	5,000 hrs @120V 3,000 hrs @130V	E26	PAR30	-	flood red	95mm	90mm	15/90
D16230-003	75PAR30/HAL/FL/YELLOW 130V	75W	130V	5,000 hrs @120V 3,000 hrs @130V	E26	PAR30	-	flood yellow	95mm	90mm	15/90

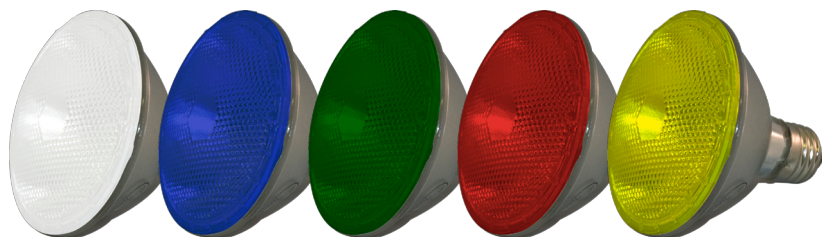

**Symban Lighting Corp.**  
 99 First Gulf Blvd. Brampton, ON  
 T. 905.450.5999 | F. 905.450.6665

All specifications are subject to change without notice. Actual performance may vary depending on operating conditions.