

Technical Data Sheet

SY-5/7P N20000-003

Magnetic Compact Fluorescent Ballast
Type 1 Outdoor | Class P
Sound Rating A
No PCB's | O.C.V.: 120V
120V | 60Hz





Technical/Electrical Data

| No. of Lamps | Lamps Operated | Rated Lamp Wattage | Voltage | Ballast Factor | Minimum Starting Temperature | Input Power | Input Current |
|--------------|----------------|--------------------|---------|----------------|------------------------------|-------------|---------------|
| 1 | CFL5S | 5W | 120V | 0.80 | -10°C | 6W | 0.11 |
| 1 | CFL7S | 7W | 120V | 0.80 | -10°C | 8W | 0.16 |


Physical Characteristics

| Length (L) | Width (W) | Height (H) | Mounting Length (M) | Lead Length (black) | Lead Length (black) |
|------------|-----------|------------|---------------------|---------------------|---------------------|
| 78mm | 43mm | 29mm | 69mm | 205mm | 450mm |

Electrical Wiring Diagram

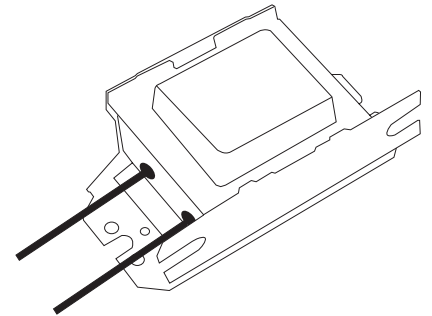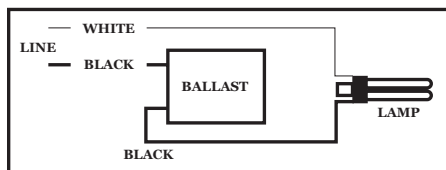

Product Labels



All specifications are subject to change without notice. Actual performance may vary depending on operating conditions.

www.symbanlighting.com

Symban Lighting Corp.
99 First Gulf Blvd. Brampton, ON
T. 905.450.5999 | F. 905.450.6665